



REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	--	REVISE PHYSICAL OUTLINE & SPECS	2-16-07	GVC	--

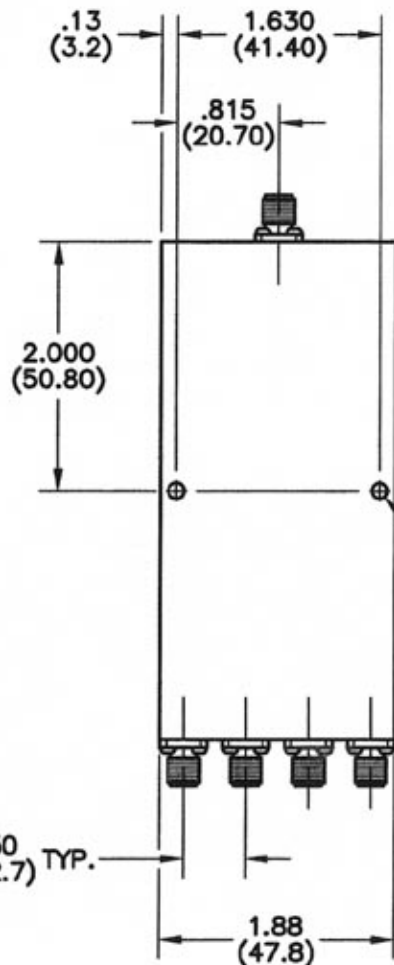

.125(3.18) DIA. THRU
2 HOLES

.50
(12.7) TYP.

1.88
(47.8)

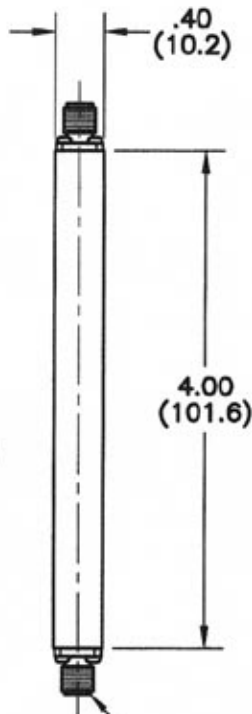

2.92mm FEMALE
5 PLACES

SPECIFICATIONS:

FREQUENCY RANGE: 0.5 - 2.0 GHz

INSERTION LOSS: 0.7 dB MAX.

ISOLATION: 22 dB MIN.

VSWR (COMMON PORT): 1.40:1 MAX.

VSWR (OUTPUT PORTS): 1.30:1 MAX.

POWER RATING: 30 WATTS AVG., WITH LOAD
VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES	
DEC.XX ± .03	FRAC ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES		DATE
DR	G.V.Cathron	12-27-06
CHK		
APPD		
APPD		

MICROWAVE DEVICES
(RF and Microwave Components)

**OUTLINE, 4PD1.25-2
4 WAY POWER DIVIDER**

CAGE	SIZE	DRAWING NO.
60674	B	900634-2
DRAWING SCALE 1.1=1		SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.
FRANKLIN, IN 46131 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.