


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	2C	CORRECTED FREQ. RANGE SPEC	2-8-07	GVC	--

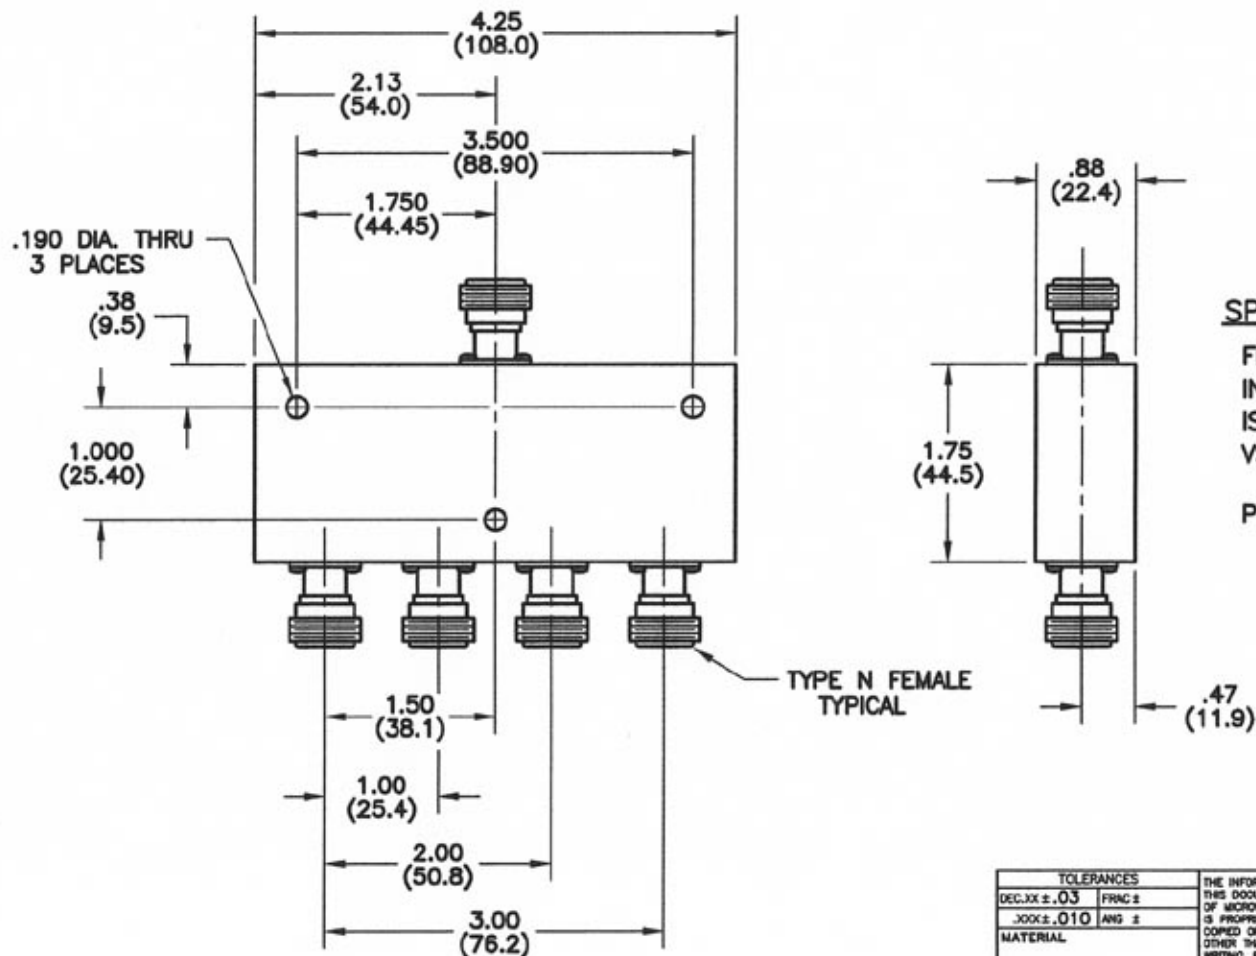

SPECIFICATIONS

FREQUENCY RANGE: 1.0 TO 2.0 GHz
 INSERTION LOSS: 0.6 dB MAX.
 ISOLATION: 20 dB MIN.
 VSWR: INPUT - 1.40:1 MAX.
 OUTPUT - 1.40:1 MAX.
 POWER: 30 WATTS AVG. W/ LOAD VSWR
 1.20:1 MAX.

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES	
DEC.XX ± .03	FRNC ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	
DR	G.V.Cothren
CHK	
APPD	
APPD	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES	DATE
DR G.V.Cothren	1-8-07
CHK	
APPD	
APPD	

MICROWAVE DEVICES
 (RF and Microwave Components)

OUTLINE, 4PD1.5N
 4 WAY POWER DIVIDER

CAGE	SIZE	DRAWING NO.
60674	B	900636
DRAWING SCALE 1=1		SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131
 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1