


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	2D	.56(14.3) DIMENSION WAS .88(22.4)	12-29-08	GVC	---
	2D	.28(7.1) DIMENSION WAS .47(11.9)			
B	4C	REVISED MOUNTING HOLE PATTERN	1-8-07	GVC	---
	3/4B	REVISED CONNECTOR LOCATIONS			

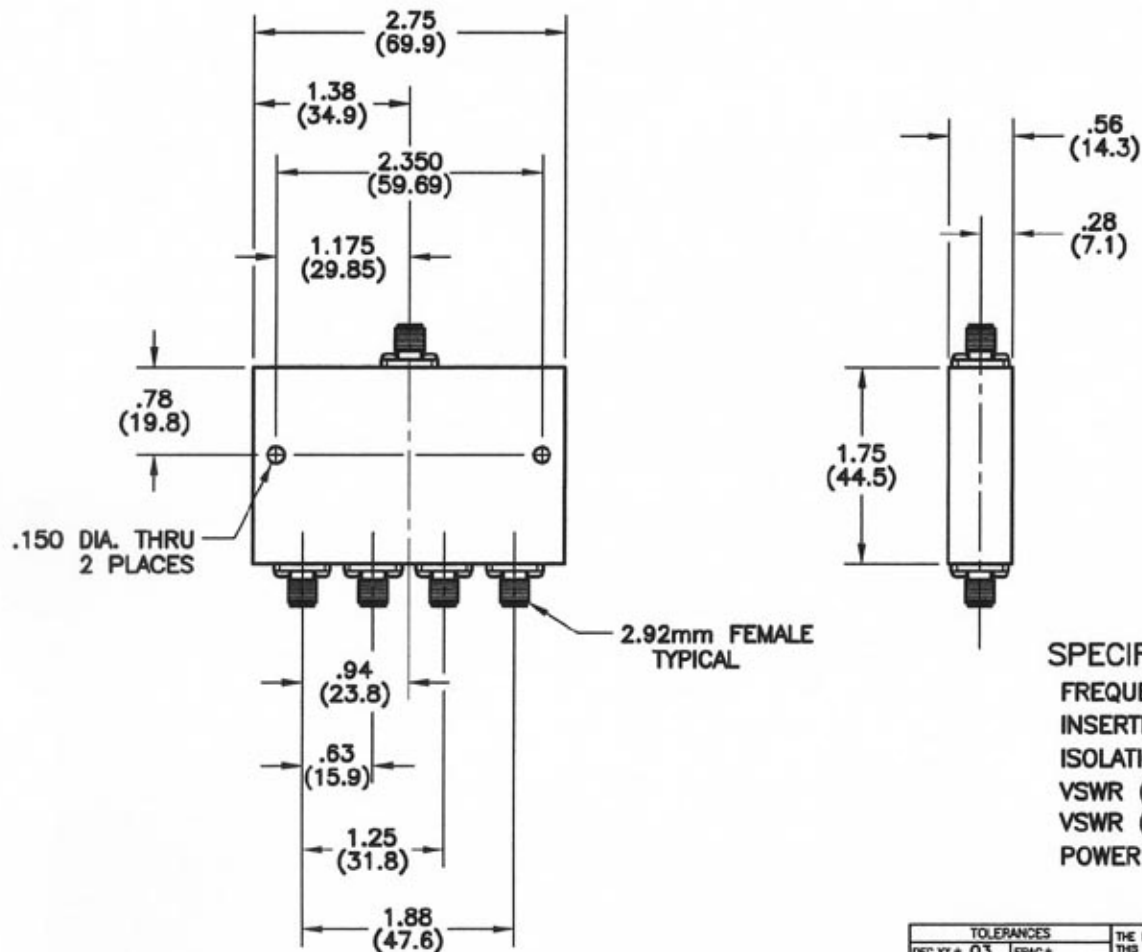

SPECIFICATIONS:

FREQUENCY RANGE: 0.8 - 2.5 GHz
 INSERTION LOSS: 0.3 dB TYP., 0.5 dB MAX.
 ISOLATION: 20 dB MIN; 23 dB TYP.
 VSWR (COMMON PORT): 1.20:1 TYP.; 1.35: MAX
 VSWR (OUTPUT PORTS): 1.20:1 TYP.; 1.35: MAX
 POWER RATING: 30 WATTS AVG., WITH LOAD VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	SIGNATURES		DATE
DEC.XI ± .03	FRAC ±		DR	G.V.Cothren	11-10-08
.XXX ± .010	ANG ±		CHK		
MATERIAL			APPD		
FINISH		APPD			

MICROWAVE DEVICES
(If and Where Components)

OUTLINE, 4PD1.65-2
 4 WAY POWER DIVIDER

CAGE	SIZE	DRAWING NO.	900360-2
60674	B		
DRAWING SCALE 1=1			SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131
 (317) 738-8033

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1