


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

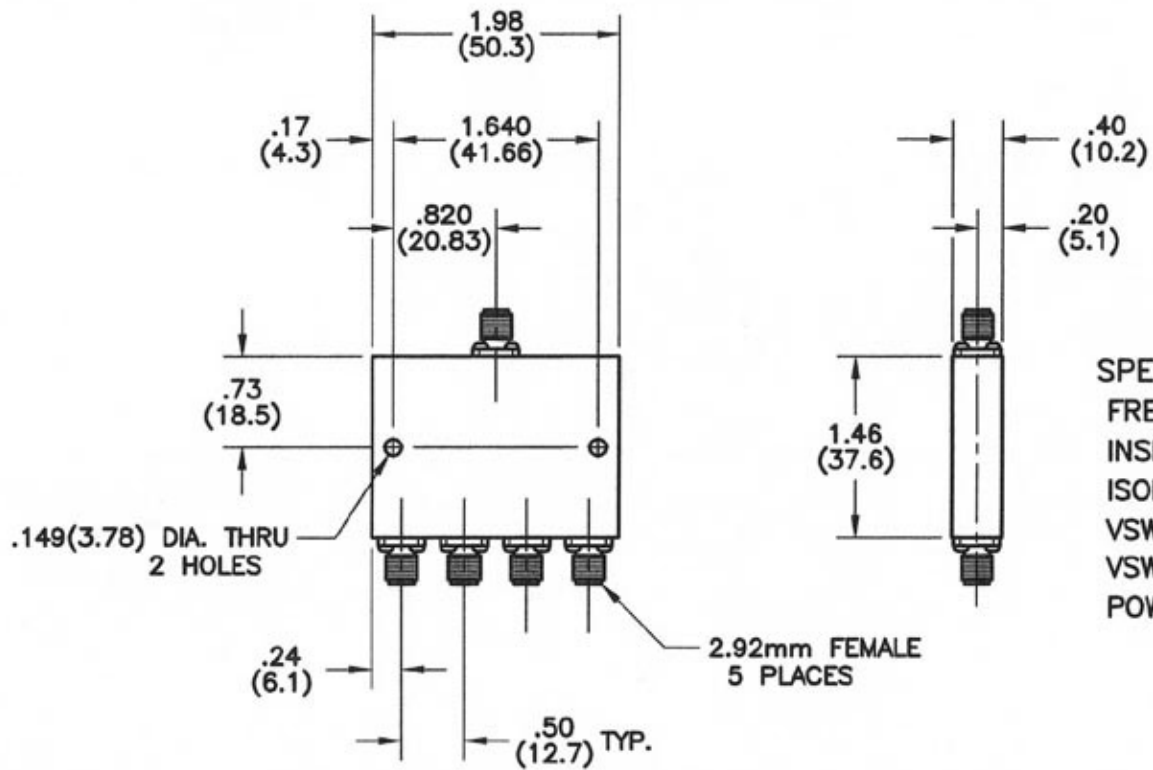

**SPECIFICATIONS:**

FREQUENCY RANGE: 8.0 - 12.4 GHz

INSERTION LOSS: 0.8 dB MAX.

ISOLATION: 18 dB MIN.

VSWR (COMMON PORT): 1.45:1 MAX.

VSWR (OUTPUT PORTS): 1.35:1 MAX.

POWER RATING: 30 WATTS AVG., WITH LOAD  
VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES  
(MILLIMETERS)

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.  
(317) 736-8633 FRANKLIN, IN 46131

TOLERANCES	
DECIMAL ± .03	FRACTION ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	
SIGNATURES	
DR	G.V.Cathron
CHK	
APPD	
APPD	
DATE	
	2-19-07

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

**MICROWAVE DEVICES**  
RF and Microwave Components

OUTLINE, 4PD10.0-2  
4 WAY POWER DIVIDER

CAGE	SIZE	DRAWING NO.
60674	B	900649-2
DRAWING SCALE 1=1		SHEET 1 OF 1

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1