


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

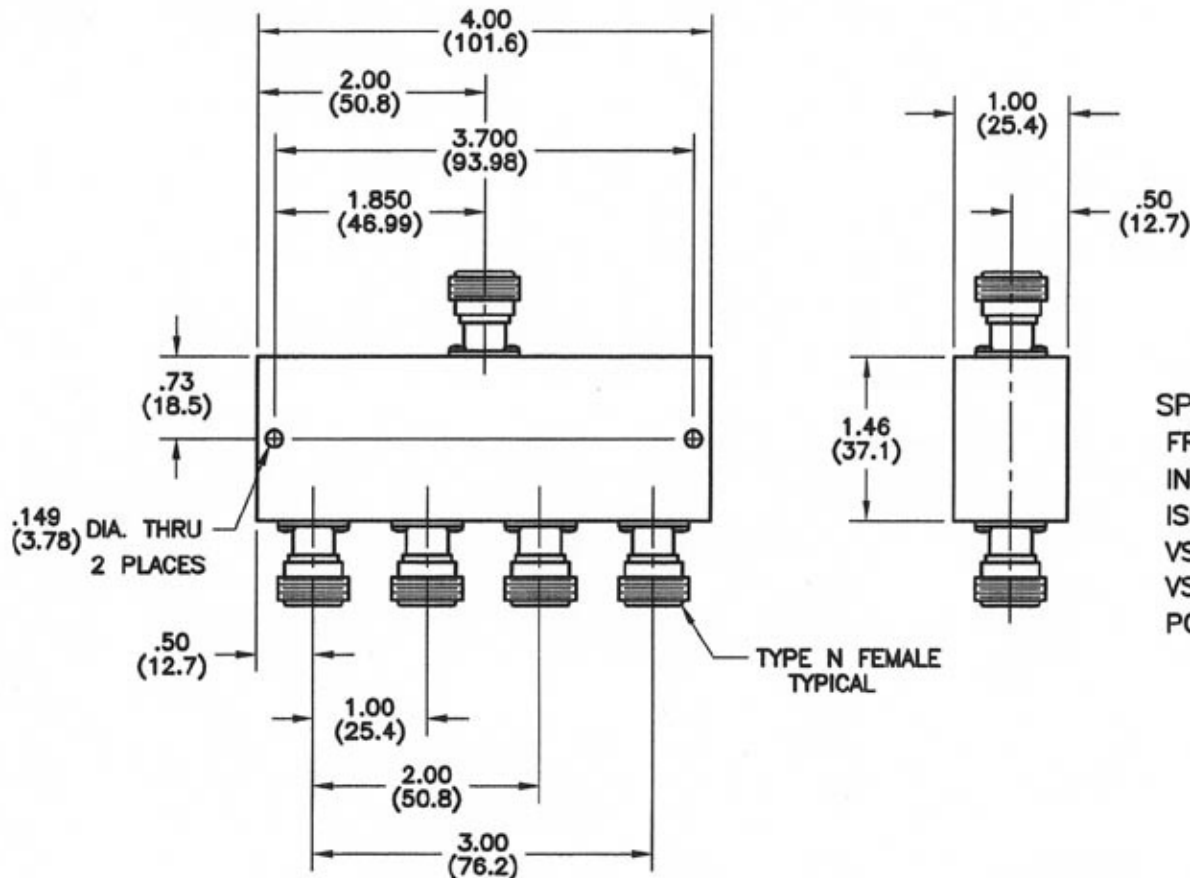

SPECIFICATIONS:

FREQUENCY RANGE: 8.0 - 12.4 GHz

INSERTION LOSS: 1.1 dB MAX.

ISOLATION: 17 dB MIN.

VSWR (COMMON PORT): 1.60:1 MAX.

VSWR (OUTPUT PORTS): 1.50:1 MAX.

POWER RATING: 30 WATTS AVG., WITH LOAD
VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES
(MILLIMETERS)

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.
(317) 736-8833 FRANKLIN, IN 46131

TOLERANCES

DEC.XX ± .03 FRAC ±

.XXX ± .010 ANG ±

MATERIAL

FINISH

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES DATE

DR G.V.Cothren 2-16-07

CHK

APPD

APPD

MICROWAVE DEVICES
RF and Microwave Components

OUTLINE, 4PD10.0N
4 WAY POWER DIVIDER

CAGE SIZE DRAWING NO.
60674 B 900649

DRAWING SCALE 1=1 SHEET 1 OF 1

4

3

2

1