


4

3

2

1


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

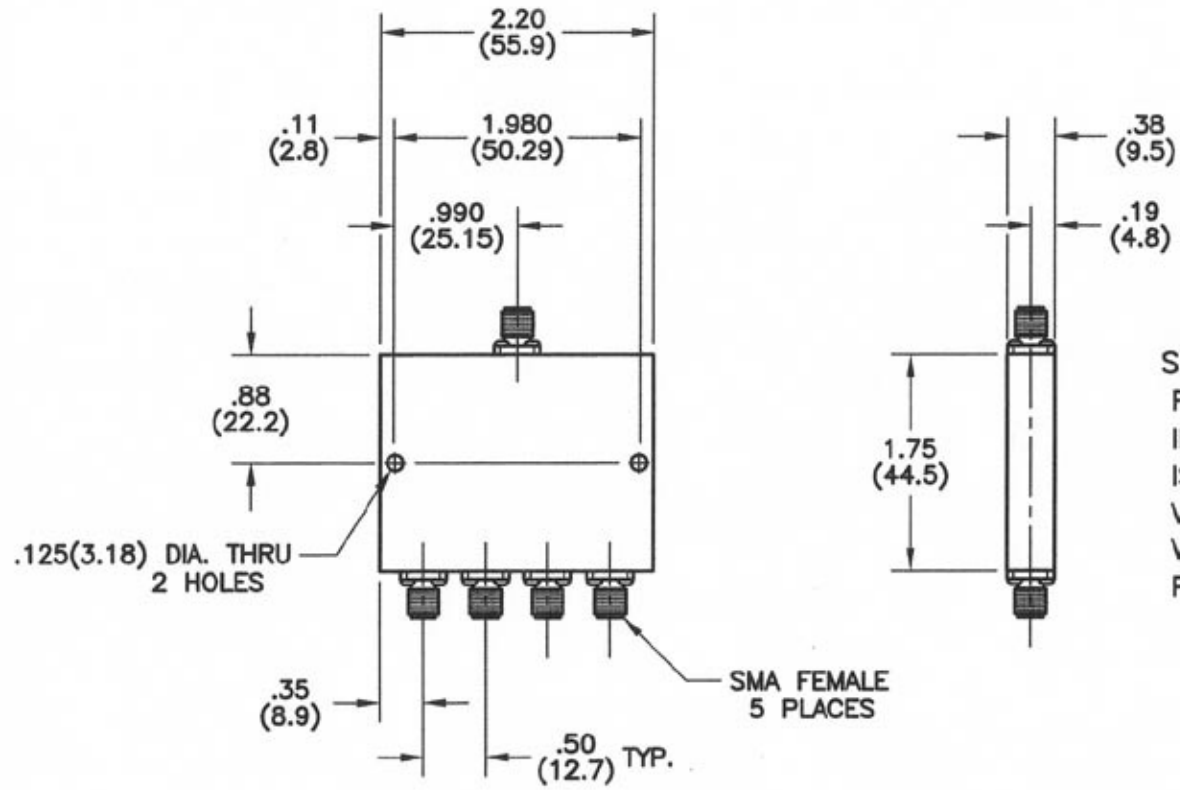

SPECIFICATIONS:

- FREQUENCY RANGE: 18.0 - 26.5 GHz
- INSERTION LOSS: 1.8 dB MAX.
- ISOLATION: 16 dB MIN.
- VSWR (COMMON PORT): 1.70:1 MAX.
- VSWR (OUTPUT PORTS): 1.70:1 MAX.
- POWER RATING: 10 WATTS AVG., WITH LOAD
- VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	 <small>RF and Microwave Components</small>	
DEC.XX ± .03	FRAC ±		OUTLINE, 4PD22.25S 4 WAY POWER DIVIDER	
.XXX ± .010	ANG ±		SIGNATURES DATE DR G.V.Cothren 2-19-07	
MATERIAL			CAGE SIZE DRAWING NO. 60674 B 900650-1	
FINISH		DRAWING SCALE 1=1 SHEET 1 OF 1		

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1