


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	--	REVISE PHYSICAL OUTLINE & SPECS	2-18-07	GVC	--

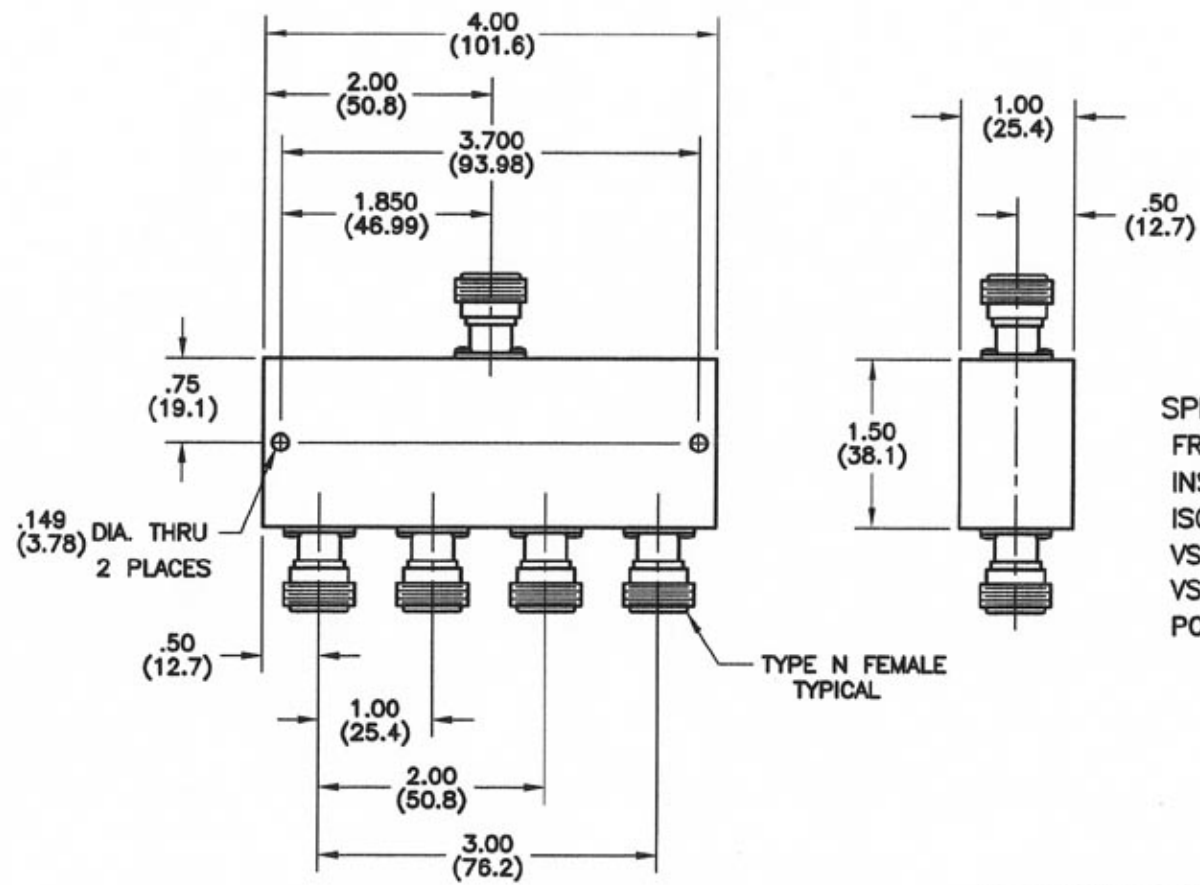

SPECIFICATIONS:
 FREQUENCY RANGE: 2.0 - 4.0 GHz
 INSERTION LOSS: 0.6 dB MAX.
 ISOLATION: 18 dB MIN.
 VSWR (COMMON PORT): 1.45:1 MAX.
 VSWR (OUTPUT PORTS): 1.40:1 MAX.
 POWER RATING: 30 WATTS AVG., WITH LOAD
 VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES (MILLIMETERS)

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 736-8833

TOLERANCES	
DEC.XX ± .03	FRAC ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES		DATE
DR	G.V.Cothren	12-27-06
CHK		
APPD		
APPD		

MICROWAVE DEVICES
RF and Microwave Components

OUTLINE, 4PD3.0N
4 WAY POWER DIVIDER

CAGE	SIZE	DRAWING NO.
60674	B	900635

DRAWING SCALE 1=1 SHEET 1 OF 1