


REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO

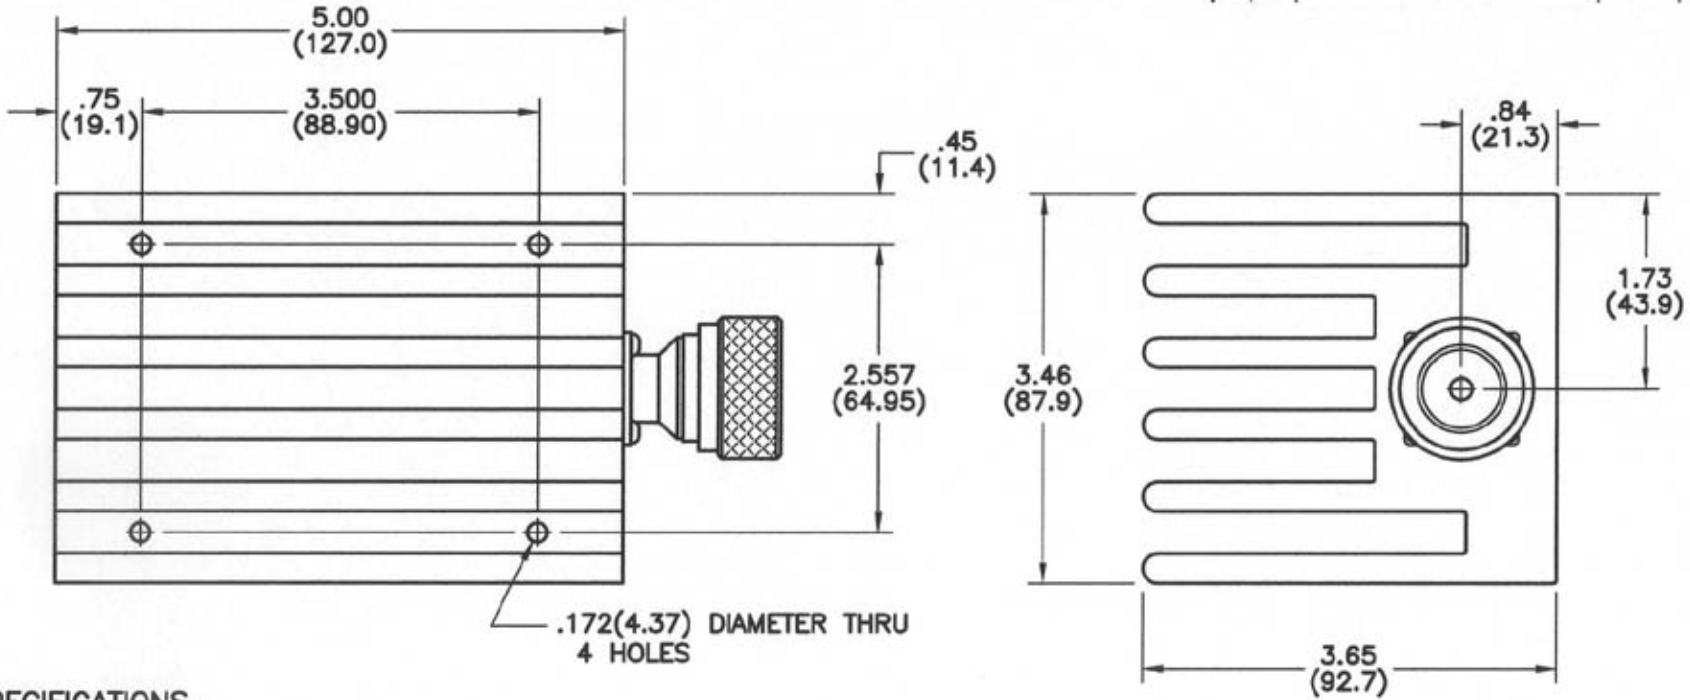

.172(4.37) DIAMETER THRU
4 HOLES

SPECIFICATIONS

FREQUENCY RANGE - DC TO 3.0 GHz
 IMPEDANCE - 50 OHMS
 VSWR (1.5 GHz) - 1.15:1
 (2.4 GHz) - 1.20:1
 (3.0 GHz) - 1.25:1

INPUT POWER (AVG.) - 100 WATTS
 (PEAK) - 2000 WATTS

OPERATING TEMPERATURE - -55°C TO +125°C
 CONNECTOR - 7/16 DIN MALE

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DECIMAL ± .03	FRACTION ±	
.000 ± .010	ANG ±	
MATERIAL		
FINISH		
SIGNATURES		DATE
DR	G.V. Cothron	1-21-05
CHK		
APPD		
APPD		

MICROWAVE DEVICES
RF and Microwave Components

OUTLINE, TERMINATION MODEL 6100L, 7/16 DIN

CAGE	SIZE	DRAWING NO.
60674	B	900466-1

DRAWING SCALE 1=1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 736-8833 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.