

# SPECIFICATIONS

FREQUENCY RANGE: DC TO 3.0 GHz

IMPEDANCE: 75 OHMS

ATTENUATION VALUES: 1 – 40dB IN ANY INCREMENT

ACCURACY: ±0.5dB OR 5%, WHICHEVER IS GREATER

VSWR: 1.20:1 (DC – 2.0 GHz)


1.30:1 (2.0 – 3.0 GHz)

INPUT POWER: 2 WATTS, 1,000 WATTS PEAK

OPERATING TEMP: –55 TO +125 °C

CONNECTORS: BNC FEMALE/FEMALE

REVISIONS				
REV	DESCRIPTION	DATE	BY	ECO

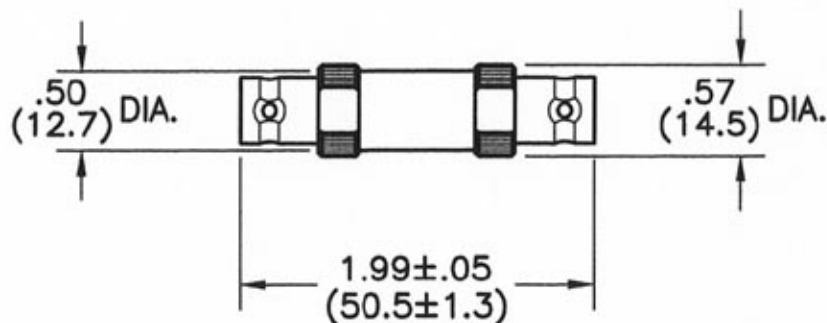

DIMENSIONS:        INCHES  
                          (MILLIMETERS)

TOLERANCES	
DEC.XX ± .03	FRAC ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

SIGNATURES		DATE
DR	G.V.Cothren	12-4-07
CHK		
APPD		
APPD		

**MICROWAVE DEVICES**  
RF and Microwave Components

OUTLINE DRAWING, MA-75B  
BNC F/F CONNECTORS

CAGE	SIZE	DRAWING NO.
60674	A	900721-2
DRAWING SCALE	1:1	SHEET 1 OF 1