
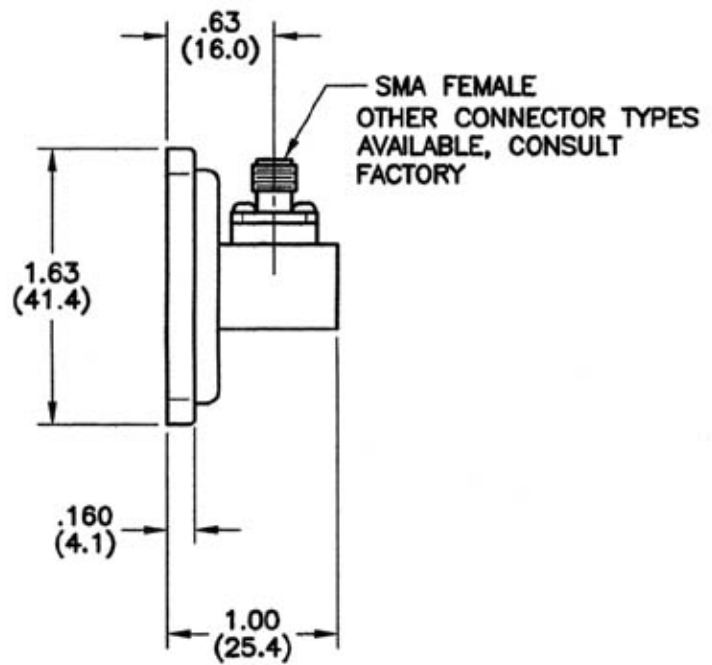


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	--	REDRAWN	8-10-09	GVC	--

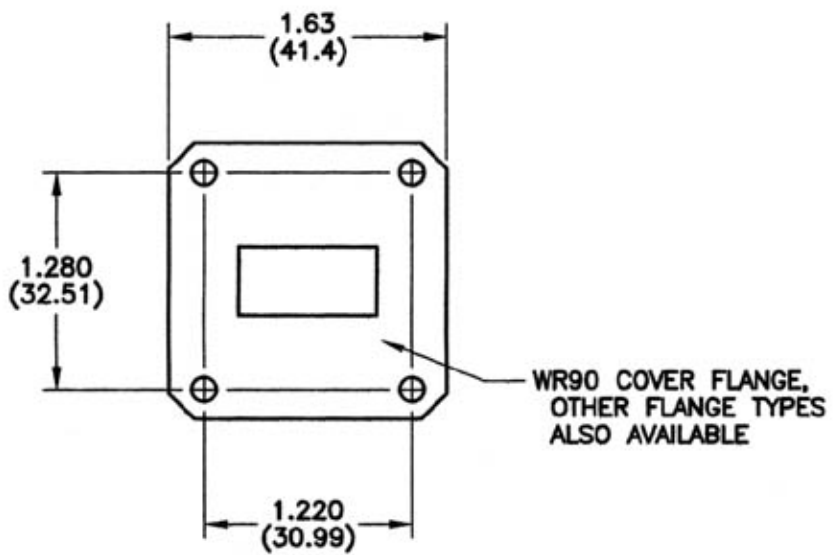

SPECIFICATIONS

- FREQUENCY RANGE: 8.2 TO 12.4 GHz
- INSERTION LOSS: 0.23 dB MAX.
- VSWR: 1.15:1 NOM., 1.25:1 MAX. (ENTIRE BAND)
- POWER RATING: 50 W. AVG., 3.0 KW PEAK
- CONNECTOR: SMA FEMALE
- MATERIAL: ALUMINUM, STD. - BRASS OR COPPER AVAILABLE
- FINISH: YELLOW CHROMATE (IRIDITE) PAINTED FINISHES AVAILABLE

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES DEC.XX ± .03 FRAC ± .XXX ± .010 ANG ±		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	MICROWAVE DEVICES <small>(RF and Microwave Components)</small>	
MATERIAL FINISH			ADAPTOR, WAVEGUIDE TO COAX, WA90-SF-C	
SIGNATURES DR G.V.Cothren		DATE 7-10-09	CAGE 60674	SIZE B
APPD		DRAWING NO. 900237	SHEET 1 OF 1	
CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 734-6833		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.		