



4

3

2

1


REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO
A	4A	ADDED SPECIFICATIONS	8-6-09	GVC ---

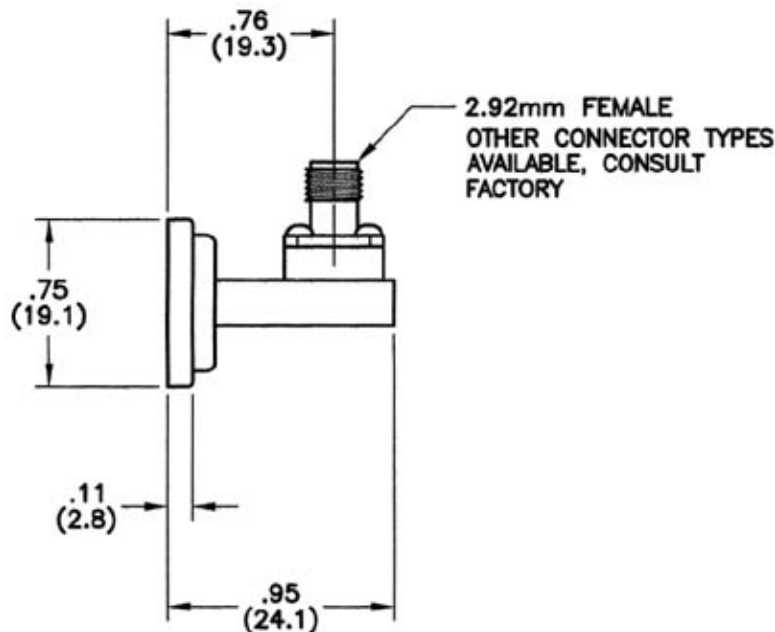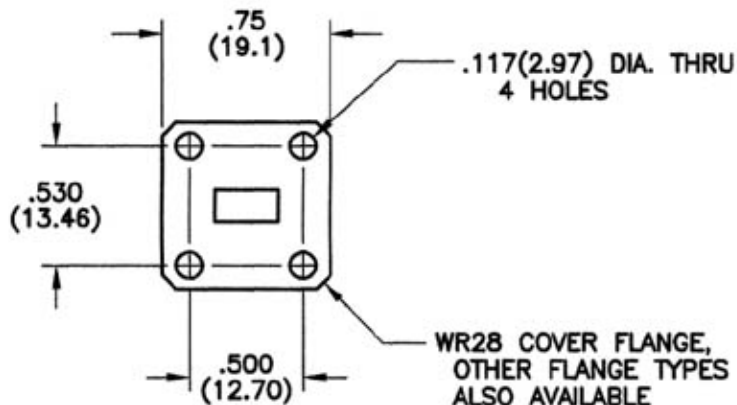

### SPECIFICATIONS

FREQUENCY RANGE: 26.5 TO 40.0 GHz  
 INSERTION LOSS: 0.39 dB MAX.  
 VSWR: 1.15:1 NOM., 1.25:1 MAX. (ENTIRE BAND)  
 POWER RATING: 10 W. AVG., 3.0 kW PEAK  
 CONNECTOR: SMA FEMALE  
 MATERIAL: ALUMINUM, STD. - BRASS OR COPPER AVAILABLE  
 FINISH: YELLOW CHROMATE (IRIDITE) PAINTED FINISHES AVAILABLE

DIMENSIONS: INCHES  
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	 <small>RF and Microwave Components</small>	
DEC.XX ± .03	FRAC ±			
.XXX ± .010	ANG ±			
MATERIAL	FINISH		SIGNATURES	
		DR	G.V.Cothren	DATE
		CHK		8-11-07
		APPD		
		APPD		
CAGE		SIZE	DRAWING NO.	
60674		B	900712	
DRAWING SCALE			SHEET	
2=1			1 OF 1	

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.  
 (317) 736-8833 FRANKLIN, IN 46131

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1