



4

3

2

1

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO
A	---	REVISED PHYSICAL DIMENSIONS	3-5-09	GVC ---
B	4A	ADDED SPECIFICATIONS	8-10-09	GVC ---

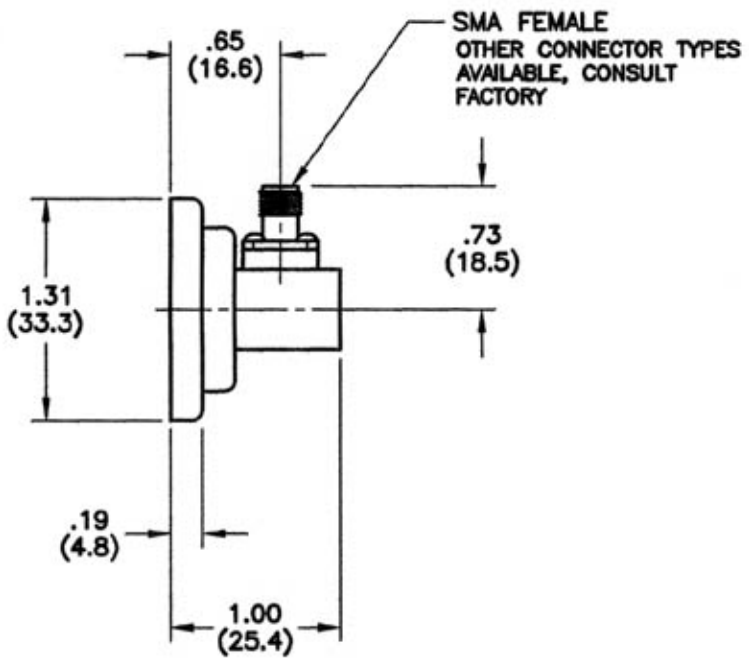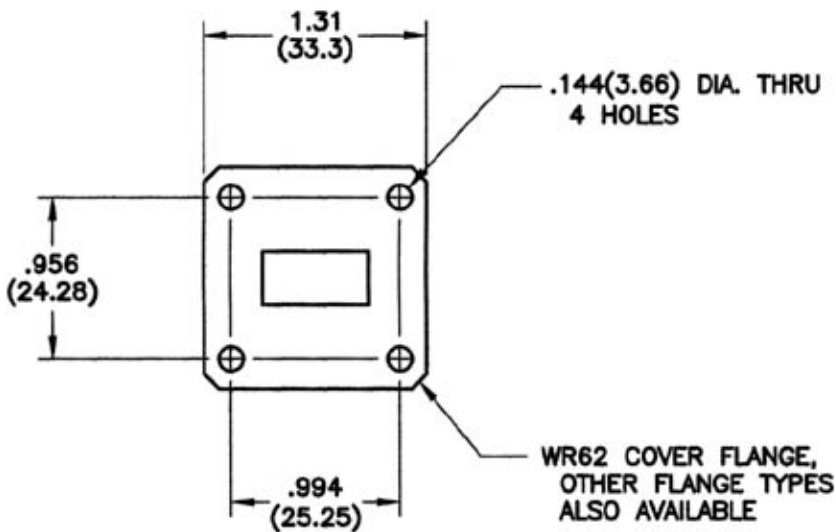

SPECIFICATIONS

FREQUENCY RANGE: 12.4 TO 18.0 GHz
 INSERTION LOSS: 0.27 dB MAX.
 VSWR: 1.15:1 NOM., 1.25:1 MAX. (ENTIRE BAND)
 POWER RATING: 50 W. AVG., 3.0 KW PEAK
 CONNECTOR: SMA FEMALE
 MATERIAL: ALUMINUM, STD. - BRASS OR COPPER AVAILABLE
 FINISH: YELLOW CHROMATE (IRIDITE) PAINTED FINISHES AVAILABLE

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES	
DEC.XI ± .03	FRAC ±
XXX ± .010	ANG ±
MATERIAL	
FINISH	
SIGNATURES	
DR	G.V.Cothren
CHK	
APPD	
APPD	

Microwave Devices
RF and Microwave Components

ADAPTER, WAVEGUIDE TO COAX, WA62-SF-C

CAGE 60674 SIZE B DRAWING NO. 900423-1

DRAWING SCALE 1.5:1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAWHAM RD. FRANKLIN, IN 46131
 (317) 736-8633

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1