


4

3

2

1

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO

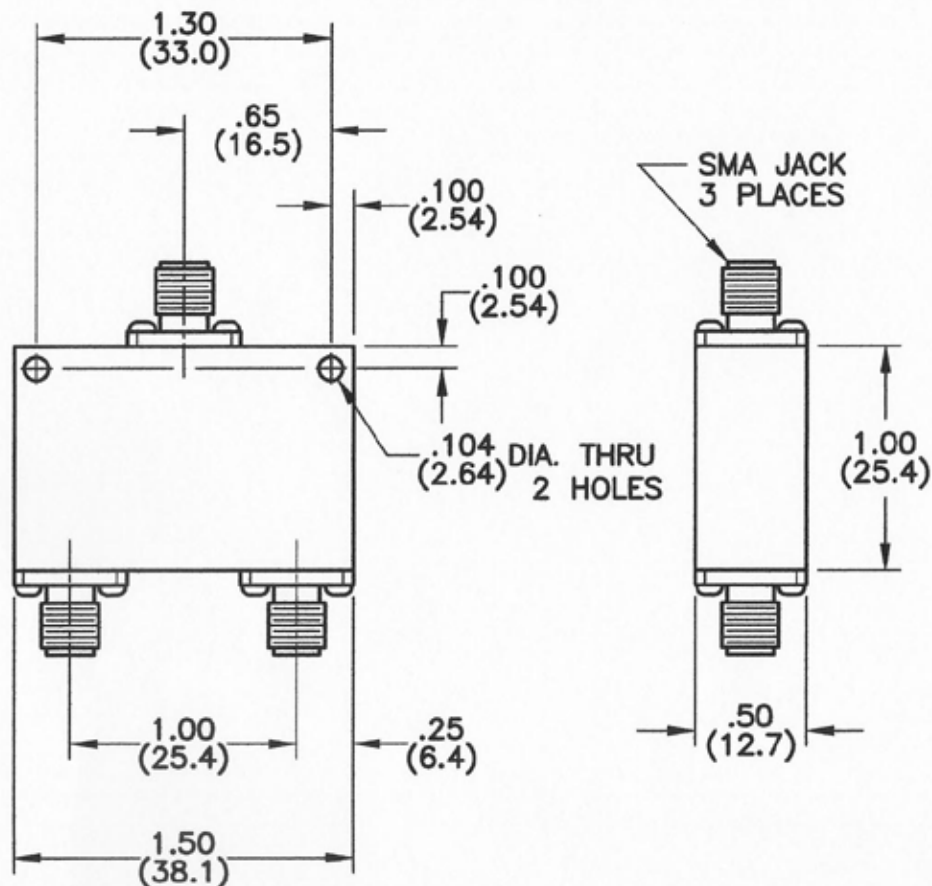

SPECIFICATIONS:

FREQUENCY: 0.8 - 3.0 GHz

ISOLATION: 28dB TYP., 25dB MIN.

VSWR: 1.20:1 MAX.

INSERTION LOSS: 0.5dB MAX, 0.3 dB TYP

POWER: 30 WATTS AVG., WITH LOAD

VSWR OF 1.20:1 OR BETTER

DIMENSIONS: (INCHES
(MILLIMETERS))

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DEC. XX ± .03	FRACTION ±	
XXX ± .010	ANG ±	
MATERIAL		
FINISH		
SIGNATURES		DATE
DR	G.V. Cothron	12-8-08
CHK		
APPD		
APPD		

Microwave Devices
RF and Microwave Components

OUTLINE, MODEL 2PD1.9-S
2-WAY DIVIDER, SMA

CAGE	SIZE	DRAWING NO.
60674	B	900632
DRAWING SCALE		SHEET 1 OF 1
1.75:1		

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.
(317) 736-8833 FRANKLIN, IN 46131

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1