


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	4A	REVISED AVAILABLE ATTEN. VALUES	6-20-06	GVC	---
B	1D	.94(23.9) DIM. WAS .84(21.3)	3-5-07	GVC	---

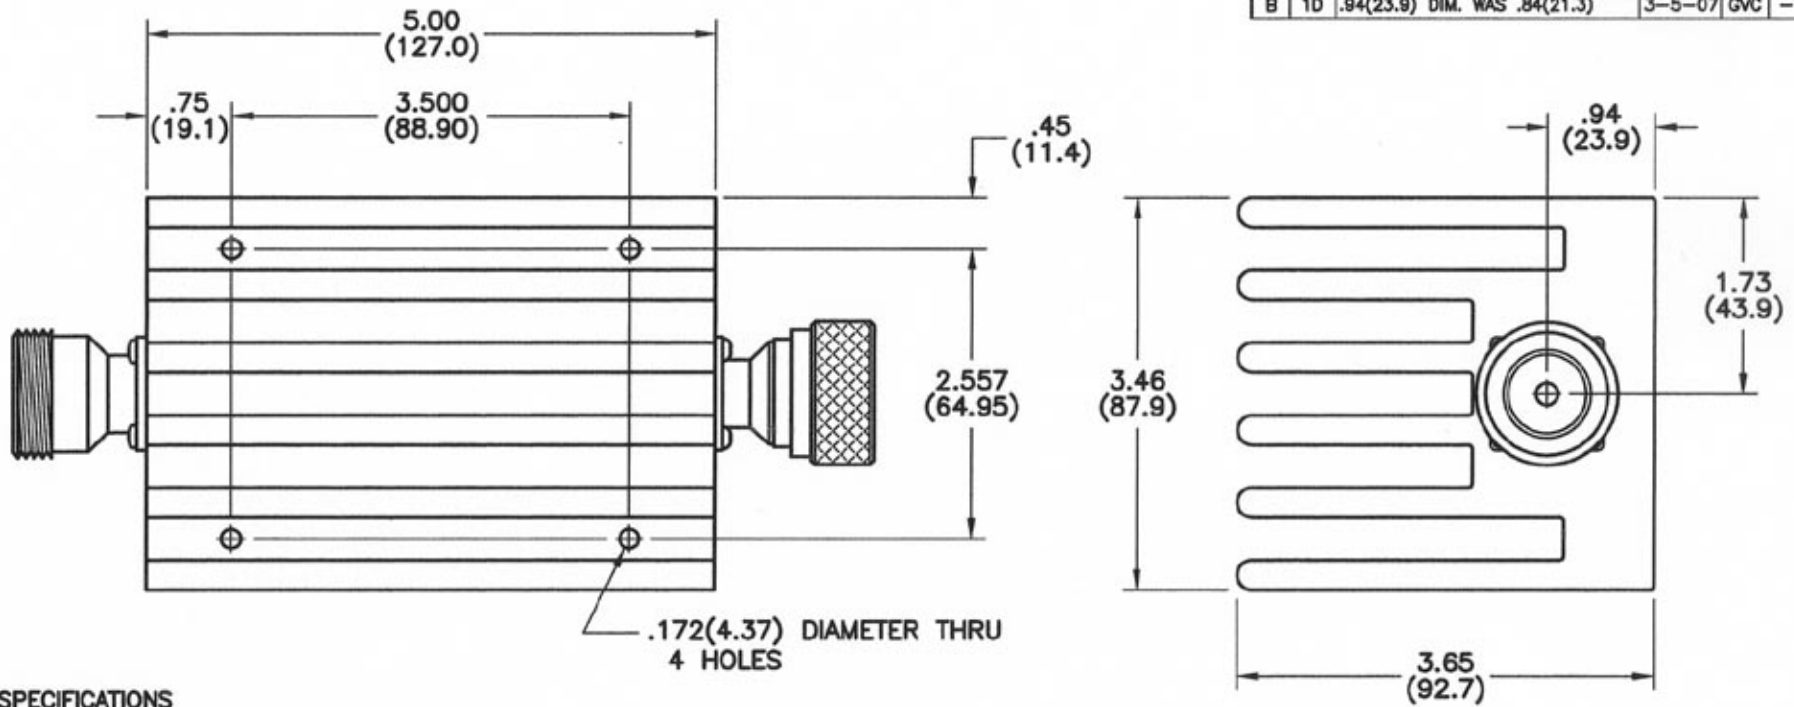

SPECIFICATIONS

FREQUENCY RANGE - DC TO 3.0 GHz
 IMPEDANCE - 50 OHMS
 ATTENUATION VALUE - 1-40 dB IN ANY 1 dB INCREMENT
 ACCURACY : ± 0.5 dB 3 - 10 dB, ± 0.75 dB 20 - 40 dB
 VSWR (1.5 GHz) - 1.15:1
 (2.4 GHz) - 1.20:1
 (3.0 GHz) - 1.25:1
 INPUT POWER (AVG.) - 100 WATTS
 (PEAK) - 2000 WATTS
 OPERATING TEMPERATURE - -55°C TO $+125^{\circ}\text{C}$
 CONNECTOR TYPES - 7/16 DIN, MALE-FEMALE

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DEC.XX \pm .03	FRAC \pm	
.XXX \pm .010	ANG \pm	
MATERIAL		
FINISH		
SIGNATURES		DATE
DR G.V.Cothren		1-21-06
CHK		
APPD		
APPD		

MICROWAVE DEVICES
for Microwave Components

**OUTLINE, ATTENUATOR
MA-5100L, 7/16 DIN**

CAGE 60674 SIZE B DRAWING NO. 900463-1

DRAWING SCALE 1=1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
(317) 736-8833 FRANKLIN, IN 46131

4

3

2

1