


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	4A	REVISED AVAILABLE ATTEN. VALUES	6-20-06	GVC	--

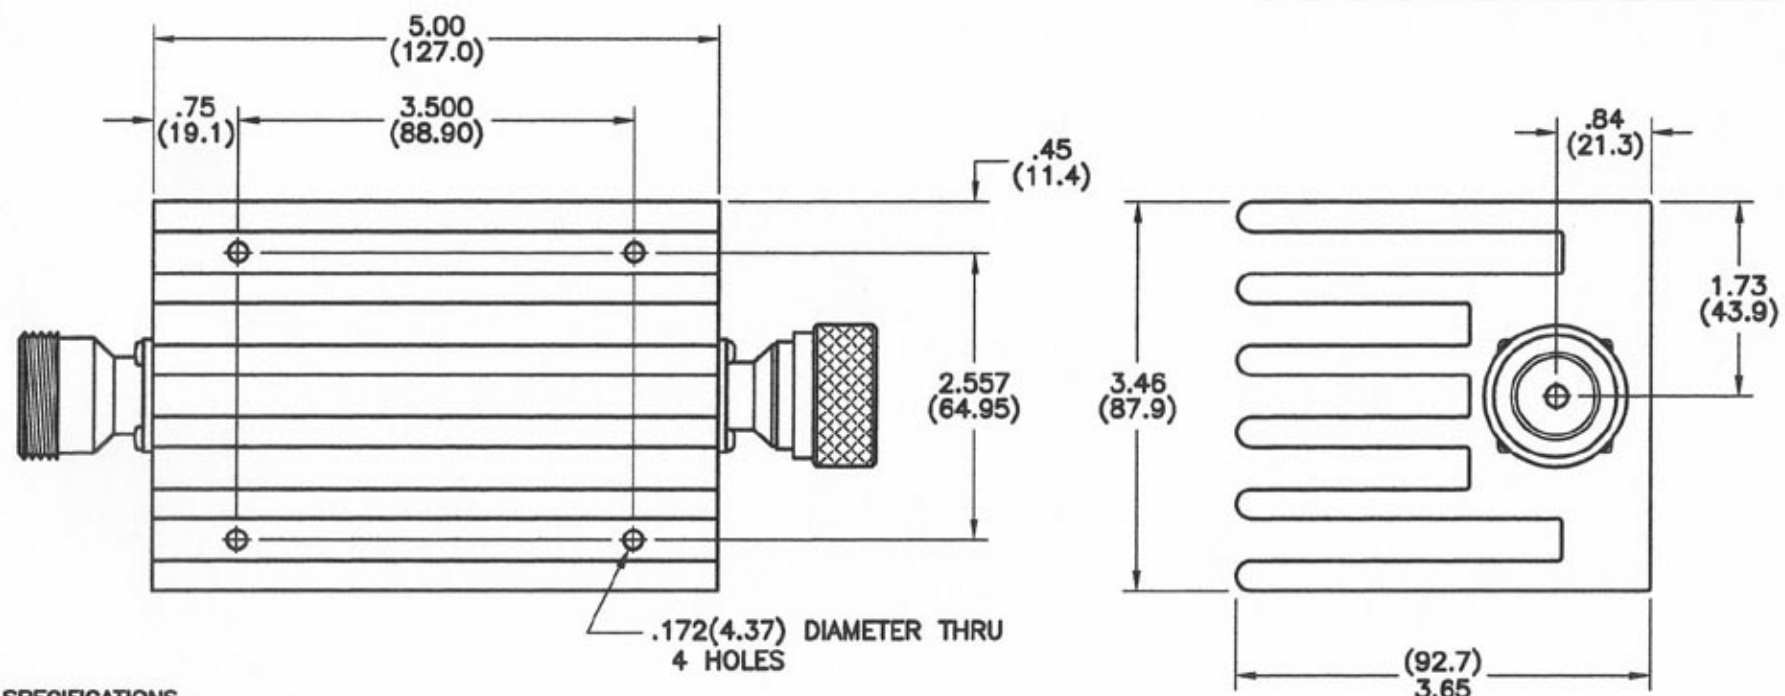

SPECIFICATIONS

FREQUENCY RANGE - DC TO 3.0 GHz
 IMPEDANCE - 50 OHMS
 ATTENUATION VALUE - 1-40 dB IN ANY 1 dB INCREMENT
 ACCURACY : ±0.5 dB 3 -10 dB, ±0.75 dB 20 - 40 dB
 VSWR: DC TO 2.4 GHz - 1.20:1
 2.4 TO 3.0 GHz - 1.28:1
 INPUT POWER (AVG.) - 150 WATTS
 (PEAK) - 2000 WATTS
 OPERATING TEMPERATURE - -55°C TO +125°C
 CONNECTORS - 7/16 DIN, MALE-FEMALE

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	SIGNATURES		DATE
DEC.XI ± .03	FRAC ±		DR	G.V.Cothren	5-25-06
XXX ± .010	ANG ±		CHK		
MATERIAL			APPD		
FINISH		APPD			

MICROWAVE DEVICES
 (If and Wherein Applicable)
OUTLINE, ATTENUATOR
MA-5150L, 7/16 DIN
 CAGE CODE 60674 B DRAWING NO. 900593-1
 DRAWING SCALE 1=1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131
 (317) 734-8633
 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.